



JEKKO JVM800-R

#MadeforLiftingHeroes

JEKKO JVM800-R

Product overview



This accessory is a **stand-alone manipulator**, which means that it does not require any connection to the LMI, electric and hydraulic system of the crane for its operation. It complies with **EN13155** standard.


Thanks to its **full electric functions**, performed by electric actuators powered by a battery, it has no hydraulic circuit, simplifying its operation and maintenance.

This accessory is operated by the operator through a dedicated **independent radio control**.



Characteristics and components

Below is an overview of the components that make up the JVM800-R accessory:

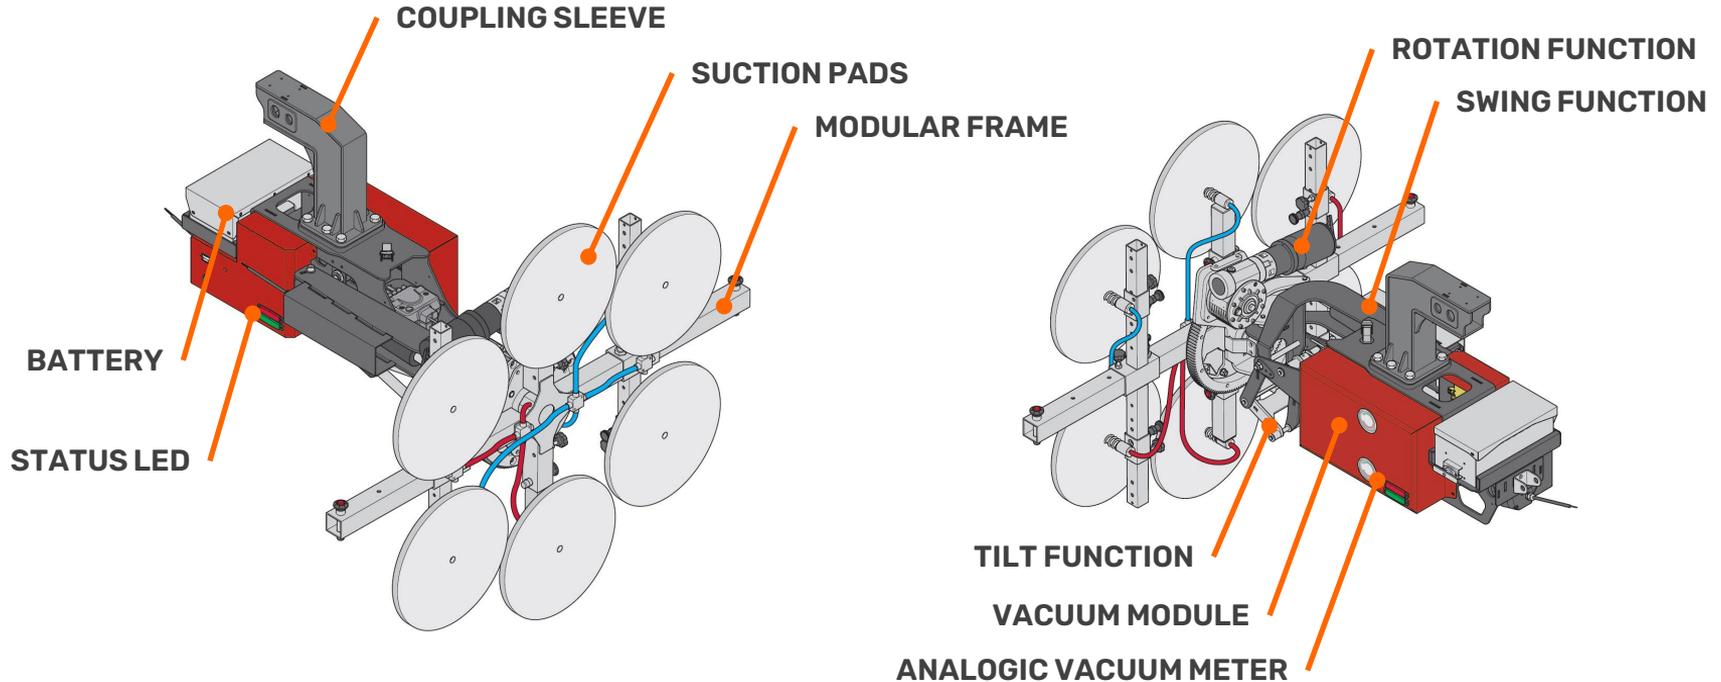


Movements range

The wide range of movements available makes it possible to install panels and glass panes in the **most difficult-to-reach positions** and in conditions where it would be impossible for traditional suction cup lifts to do so, allowing for example **diagonal passage** and **vertical** and **inclined installation** of the panels.


ROTATION

Continuous rotation 360°

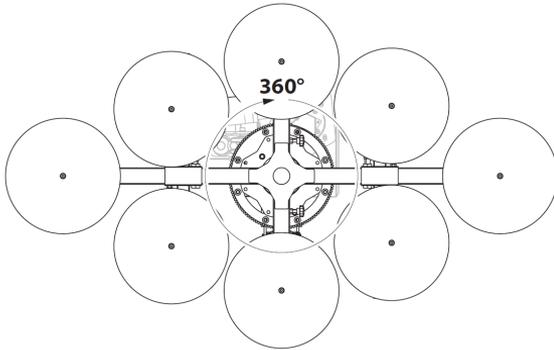


TILT

Tilting angle which allows operation from the plane parallel to the ground of +91° to a vertical negative angle of -45°

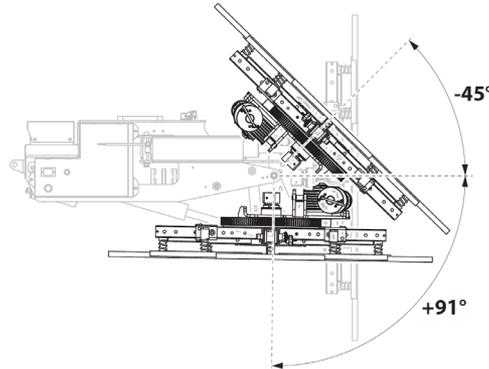


SWING




Swing function that allows panels to be installed even if not perpendicular to the crane boom, as well as diagonal passage to allow installation.

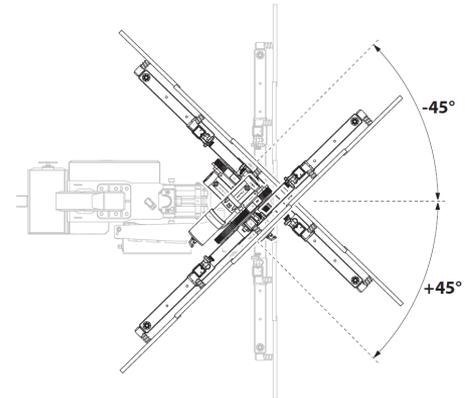

Frame modularity


Depending on the size and weight of the panel, suction cups can be added or removed from the **modular frame**, changing the **contact/working area** and **lifting capacity** accordingly.

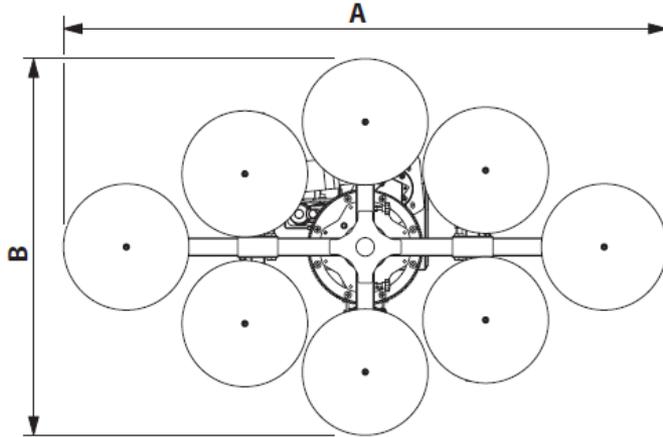

Dimensions					Lifting capacity
Configuration	Pads	Dim.	Min [mm (in)]	Max [mm (in)]	kg (lb)
	8	A	2020 (79" 1/2)	2900 (114" 1/8)	800 (1764)
		B	1250 (49" 1/4)	1250 (49" 1/4)	
	6	A	1230 (48" 3/8)	1800 (70" 7/8)	600 (1323)
		B	1250 (49" 1/4)	1250 (49" 1/4)	
	4	A	1230 (48" 3/8)	1800 (70" 7/8)	400 (882)
		B	920 (36" 1/4)	1200 (47" 1/4)	


Remote control

As this attachment is completely independent of the crane, in addition to having its own battery it is equipped with a dedicated **radio remote control**, which allows **extremely precise** operation of the functions.

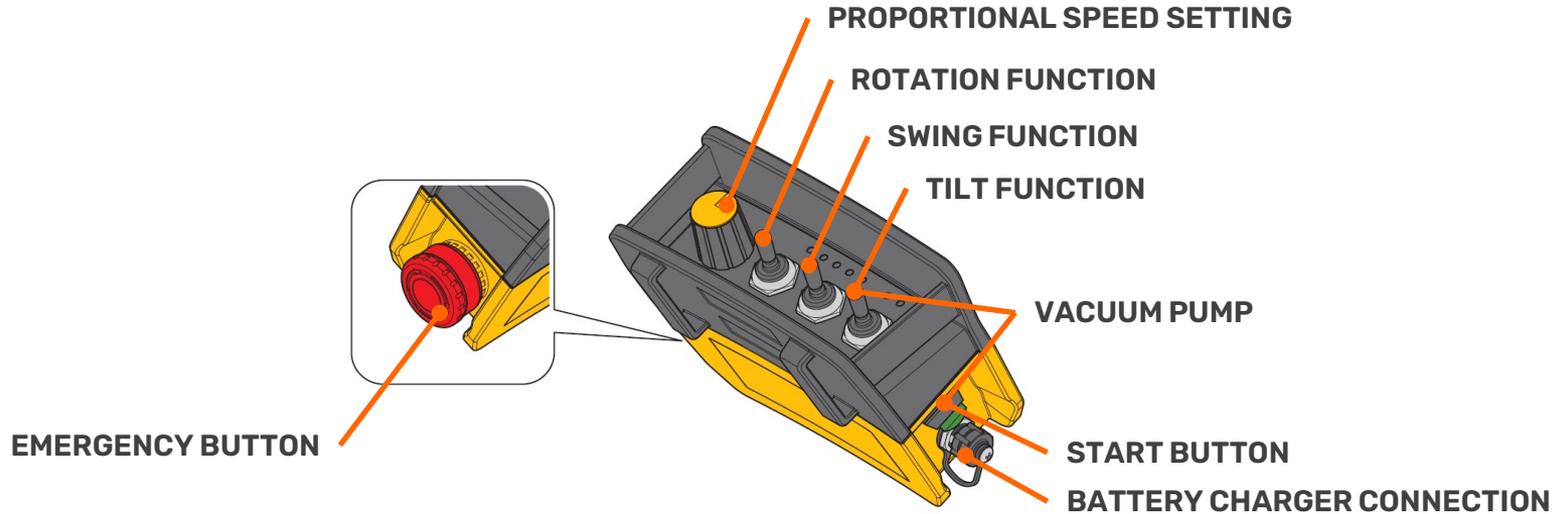




Resting support

To **facilitate transport** of the attachment and its components, the JVM800-R comes with a dedicated resting support. This guarantees also an **easy installation** on the crane. In addition, the spare battery is recharged here, using a 110-230V charger.

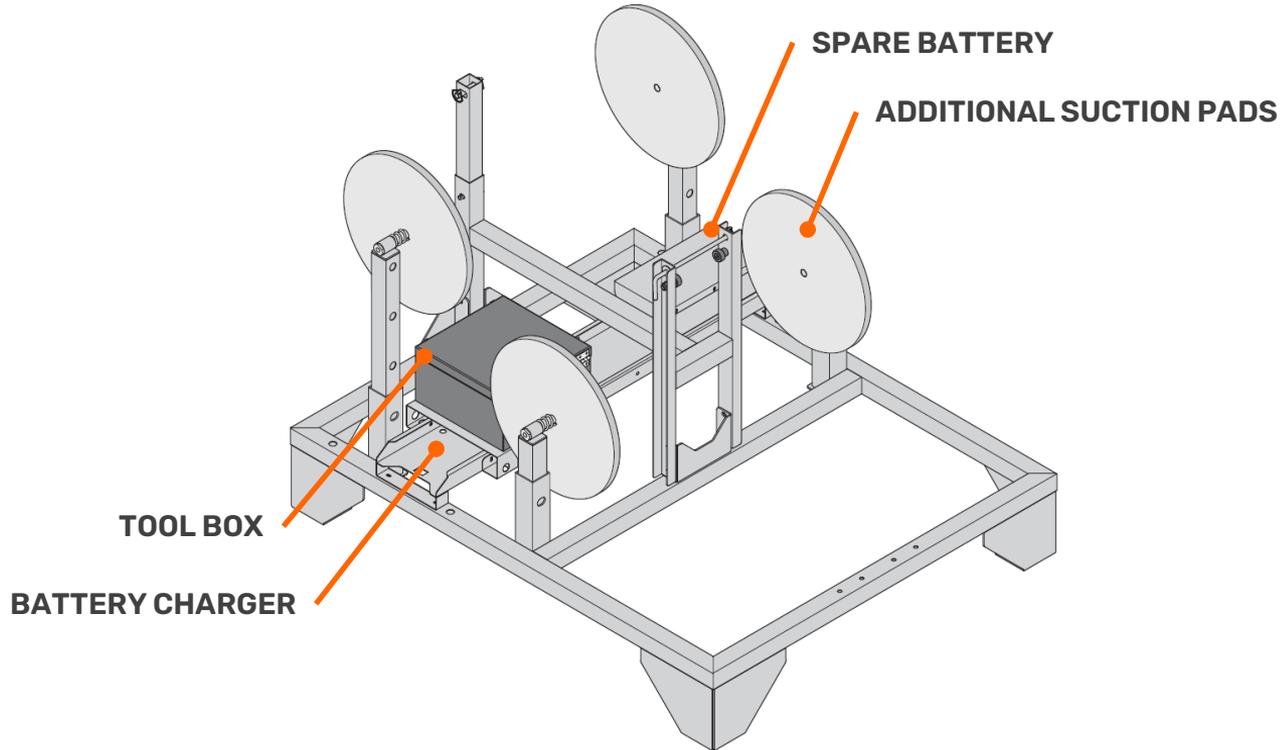


JEKKO JVM800-R

Case history

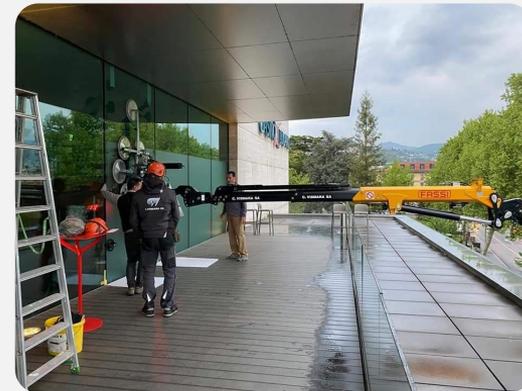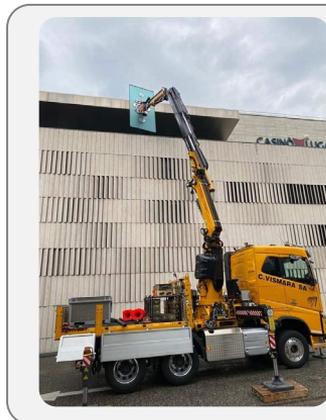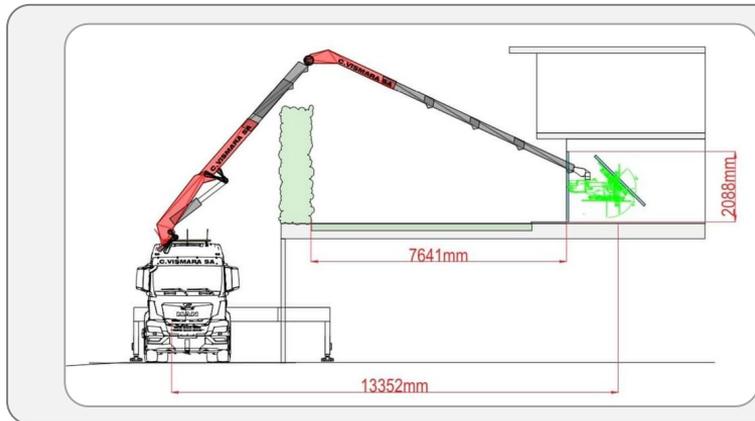

JEKKO JVM800-R

Case history

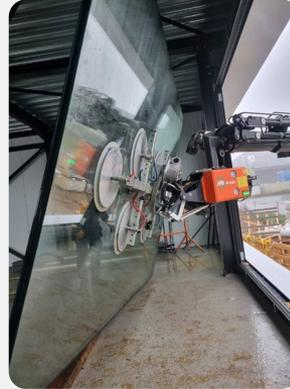



www.jekko-cranes.com

 @jekkocranes  Jekko Cranes
 @jekkocranes  Jekko Cranes
 @jekkocranes  @jekkocranes

Jekko s.r.l.

Via Campardone, Colle Umberto, Italy
+39 0438 1710083 | info@jekko.it